

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 April 2001 (26.04.2001)

PCT

(10) International Publication Number
WO 01/29780 A1

(51) International Patent Classification⁷: **G07B 17/00**

(21) International Application Number: **PCT/US00/41322**

(22) International Filing Date: **19 October 2000 (19.10.2000)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
60/154,523 **19 October 1999 (19.10.1999)** **US**

(71) Applicant (for all designated States except US):
**STAMPS.COM [US/US]; Suite 1040, 3420 Ocean
Park Boulevard, Santa Monica, CA 90405 (US).**

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WINSLOW, Richard,
Baker [US/US]; 4133 Jasmine Avenue, Culver City, CA
90232 (US).**

(74) Agent: **REED, Derrick, W.; Christie, Parker & Hale,
LLP, 350 W. Colorado Blvd., P.O. Box 7068, Pasadena, CA
91109-7068 (US).**

(81) Designated States (national): **AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.**


(84) Designated States (regional): **ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).**

Published:

- *With international search report.*
- *Before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments.*

[Continued on next page]

(54) Title: **ADDRESS MATCHING SYSTEM AND METHOD**

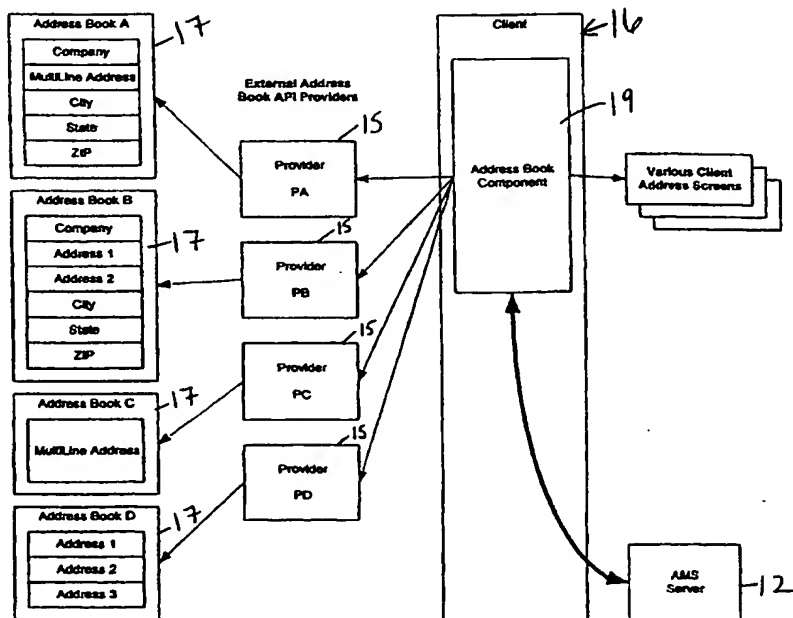

(57) Abstract: An address matching system that maintains a central database of valid addresses has been designed. According to the invention, address matching requests are received by the system from a plurality of remote users located at respective machines ("clients"). Those requests are processed at the central system, and the results are returned to the client that made the request. In addition, novel techniques are implemented for improving the likelihood of obtaining one or more matches from a request.

WO 01/29780 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

ADDRESS MATCHING SYSTEM AND METHOD

CROSS-REFERENCE TO RELATED APPLICATIONS

This patent application claims the benefit of the filing date of United States Provisional Patent Application Serial No. 60/154,523, filed October 19, 1999 and entitled "USER ADMINISTRATION FOR ON-LINE POSTAGE SYSTEM", the entire contents of which is hereby expressly incorporated by reference.

FIELD OF THE INVENTION

The present invention relates to secure printing of value-bearing items (VBI), such as postage for letters and other items to be delivered by the United States Postal Service (USPS). More specifically, the invention relates to a system and method for validating addresses using a central address matching database, with such address matching being conducted over a communications network.

BACKGROUND OF THE INVENTION

A significant percentage of the United States Postal Service (USPS) revenue is from metered postage. Metered postage is generated by utilizing postage meters that print a special mark, also known as postal indicia, on mail pieces. Generally, printing postage and any other VBI can be carried out by using mechanical meters or computer-based systems. Conventionally, a business or other entity will have a meter at its place of business, and will use the meter to print postal indicia on mail pieces or on labels that are then affixed to the mail pieces.

With respect to computer-based postage processing systems, the USPS, under the Information-Based Indicia Program (IBIP), has published specifications for IBIP postage meters that identify a Postal Security Device (PSD). The PSD, in conjunction with the user's personal computer and printer, functions as the IBIP postage meter. The USPS has published a number of documents describing the PSD specifications, the indicia specifications and other related and relevant information. There are also security standards for printing other types of VBI, such as coupons, tickets, gift certificates, currency, vouchers, and the like.

1 One of the standards required by the USPS is that the
address of the intended recipient of a piece of mail be verified
by comparing the entered address with a database of valid
addresses provided by the USPS. Conventionally, this requires
5 that the sender have the database installed on their local
computer and compare the intended destination address with the
addresses in the database. Moreover, when the USPS provides a
new release of addresses, each sender is required to obtain the
updated database to continue to validate addresses. Thus, such
10 a system can be burdensome to its users.

15 In addition, since addresses vary widely in terms of number
of elements in the address and various address formats, address
matching can be a difficult undertaking, even with a current list
of all valid addresses available to the sender.

20 Therefore, it would be desirable to have a method and system
for performing address matching from a single, central location,
thereby doing away with the need for each remote user to maintain
an updated database of valid addresses. In addition, it would
be desirable to have such a system and method that allows
addresses to be validated once from a particular sender, such
25 that when the sender desires to use a previously validated
address again, there is no need to perform address matching a
second time. Moreover, it would be desirable to have a method
and system that takes a desired address and manipulates the
format into multiple structures before comparing the address with
30 a set of valid addresses in order to increase the likelihood of
obtaining a match. The present invention addresses these
desirable features.

35 SUMMARY OF THE INVENTION

In accordance with one aspect of the present invention, an
address matching system that maintains a central database of
valid addresses has been designed. According to the invention,
address matching requests are received by the system from a
plurality of remote users via respective devices ("clients").
35 Those requests are processed at the central system, and the
results are returned to the client that made the request.

In one embodiment, the central system, in cooperation with
the client, utilizes novel address matching techniques to

1 increase the likelihood of finding a match for a received
address. Preferably, the invention utilizes one or more query
permuters to arrange the address data in different formats in an
effort to increase the likelihood of finding a match for a
particular address.

5 In another aspect, the invention describes a method for
matching an address entered by a user with a database of valid
addresses, comprising: receiving the address from a source;
accessing a database that contains one or more valid addresses;
10 comparing the address from the user with the database of valid
addresses; and storing information relating to the address in a
companion file if a match is found..

15 In yet another embodiment, the invention is directed to a
method for validating an address, comprising: receiving the
address from a source, accessing a database of valid addresses,
comparing the address from the source with the database of valid
addresses, and storing selected information relating to the
address in a companion file at the remote terminal if a match is
found.

20 In still another embodiment, the invention is directed to a
method of validating an address, comprising: receiving address
data in a particular format; manipulating the data into a
predetermined format corresponding to the particular format;
comparing data in the predetermined format with valid addresses
25 in the database; and presenting the results if one or more
matches are found.

30 In another embodiment, the invention is directed to a method
for importing one or more addresses from a database of addresses,
where the database of addresses stores address data in a selected
format. The method involves storing the one or more addresses
at the database of addresses in the selected format; receiving
the address data along with identification data to identify at
least a characteristic of the database of addresses; processing
the identification data; and processing the address data in a
35 particular manner based on the identification data corresponding
to the database of addresses.

In yet another embodiment, the invention is directed to a
system for comparing a received address with a set of validated
addresses. The system includes a remote device that maintains

1 an internal address book in a particular data format. The remote
device includes at least one address book provider that is
operative to interact with an external address book, the provider
being operative to access data in the external address book and
5 to provide data relating to the database structure format of the
external address book. The system also includes an address
matching server that maintains a database containing the set of
validated addresses. The address matching server is capable of
communication with the remote device via a communication network,
10 and is operative in response to receipt of the address data and
the database structure format data from the remote device to
process the address data, compare the processed data with the set
of validated addresses, and transmit one or more matches to the
remote device.

15 In still another embodiment, the invention is directed to a
method of comparing a received address with a set of validated
addresses, including identifying an address in an external
address book; accessing corresponding address data in the
external address book with an address book provider that is
20 operative to interface with the external address book; checking
the address data against a local companion file to determine
whether the address is valid; and validating the address at an
address matching server that maintains a database of valid
addresses if the result of the check with the local companion
25 file does not validate the address.

30 In another embodiment, the invention is directed to a method
of comparing a received address with a set of validated
addresses, including identifying an address in an external
address book; accessing corresponding address data in the
external address book with an address book provider; and
35 validating the address at a remote address matching server that
maintains a database of valid addresses.

In yet another embodiment, the invention is directed to a
method of comparing a received address with a set of validated
addresses, including identifying an address in an external
address book; accessing corresponding address data in the
external address book with an address book provider; and
40 validating the address at a server that maintains a database of

1 valid addresses, wherein validating comprises using one or more query permuters to process the address data.

BRIEF DESCRIPTION OF THE DRAWINGS

5 The objects, advantages and features of this invention will become more apparent from a consideration of the following detailed description and the drawings, in which:

10 FIG. 1 is a simplified block diagram of a remote user terminal ("client") connected to an address matching server via a two-way communication network according to one embodiment of the present invention;

FIG. 2 is an exemplary flow diagram of an address matching routine according to one illustrative embodiment of the invention;

15 FIG. 3 is an exemplary flow diagram of an address comparison routine according to one illustrative embodiment of the invention;

FIG. 4 is an address importing routine according to one illustrative embodiment of the invention;

20 FIG. 5 is a block diagram of the system of FIG. 1 and including plural external address book providers according to one illustrative embodiment of the invention;

FIG. 6 is a chart of various field names used by various external address books;

25 FIG. 7 is a schematic depiction of a direct permutation process to transform an input address format into a USPS-supported schema;

30 FIG. 8 is a schematic depiction of a single-line permutation process to transform an input address format into a USPS-supported schema;

FIG. 9 is a flow chart depicting the operational flow of a truncate permutation process to transform a portion of a direct permutation output into a new format;

35 FIG. 10 is a screen shot of a suitable user interface to allow a user to enter address information in a free format;

FIG. 11 is a screen shot of a typical user interface listing plural possible matches for an address validation request; and

FIG. 12 is a screen shot of a suitable user interface to allow a user to enter address information in a structured format.

1 DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS OF THE INVENTION

Referring now to FIG. 1, there is shown an address matching system 10 according to one illustrative embodiment of the invention. The address matching system 10 includes an address matching system (AMS) server 12 that maintains a database 14 of a set of validated addresses. The AMS server 12 communicates with one or more remote terminals 16 (hereinafter referred to as "clients"). While only one client 16 is shown in FIG. 1, it will be understood that the system 10 is capable of interaction with multiple clients through a suitable interface. The clients 16 and AMS server 12 engage in two-way communication over a suitable communication network 18. In one embodiment, communication network 18 comprises the Internet. It will be understood by those skilled in the art that the communication network may take many different forms, such as a local area network (LAN), wide area network (WAN), wired telephone network, wireless network, or any other network that supports data communication between respective entities.

The clients 16 may take many different forms, and in one illustrative embodiment comprise a personal computer and printer, with the personal computer in one embodiment being in communication with a PSD, either locally or over a communications network. Alternatively, the clients 16 may comprise computers or any other device that has processing capabilities and that may engage in communication over communication network 18. Other examples are wireless display devices, cellular telephones, and other mobile devices. The clients 16 are preferably programmed to provide functionality to allow users ("senders") to enter addresses in various format structures, and to compare those addresses with the database of valid addresses. The functionality of the clients 16 in verifying addresses is described in greater detail below in connection with FIGS. 2 - 4 and 9. The functionality of the client 16 and PSD in printing postage indicia in one illustrative embodiment is described in more detail in pending application Serial Number _____, entitled "VIRTUAL PRINTING OF INDICIA, LOGOS AND GRAPHICS", filed on August 29, 2000, the disclosure of which is hereby expressly incorporated by reference. An exemplary on-line system is described in U.S. patent Application No. 09/163,993 filed

1 September 15, 1998, the entire contents of which are hereby
expressly incorporated by reference.

AMS server 12 will typically be associated with a web site
that is accessible by each client 16 using a suitable Uniform
Resource Locator (URL) address or the like, and will maintain a
5 database 14 of valid addresses, which is accessed by the server
12 in response to receipt of an address match request from a
client 16, along with address data corresponding to the address
that a sender at client 16 wishes to verify.

10 Referring now to FIG. 2, the basic operation of the address
matching system 10 is described in more detail. Operation begins
at step 30, with a sender entering a destination address for a
corresponding piece of mail into the associated client 16. FIG.
10 shows a suitable user interface 21 that client 16 may present
15 to user for input of the pertinent shipping information. User
interface 21 includes a pair of windows 22 into which the user
may enter delivery and return addresses in a free form (i.e.,
without separating the address information into multiple fields).
The user interface 21 also includes a number of windows 23 into
20 which the user may enter postage information, as is well known
in the art.

At query block 32, client 16 determines whether the address
has been previously validated. In one embodiment, this is
accomplished by accessing a companion file maintained by the
client 16 that stores selected information relating to each
25 address that has previously been validated, and by comparing the
address data with the data stored in the companion file. This
process is described in greater detail below in connection with
FIG. 3.

30 If the address has been previously validated, then operation
proceeds to step 34, and the address is suitable for use and
client 16 may use the address in a postage meter procedure. On
the other hand, if the address has not been previously validated,
then operation instead proceeds to step 36, and client 16
35 processes the address and then makes an address matching request
to AMS server 12, along with the processed address data.
Processing of the address data can take many different forms, as
is described in greater detail below. An example of such
processing is described below in connection with FIG. 9.

1 Operation then proceeds to step 36, and AMS server 12
compares the received address data with the data in database 14.
As will be understood in the art, each record in database 14 will
preferably consist of a plurality of elements (or fields), as
5 will the received address data. Thus, AMS server 12 compares
corresponding fields to determine whether one or more matches
exists, and the results are transmitted to the requesting client
16 at step 38. The results are preferably presented to the user
as a list, such as the list shown in FIG. 11.

10 As used herein, the term "match" does not require that the
address data correspond identically to the data in database 14.
Rather, a match (or at least a potential match) may be declared
where there is a substantial similarity between the address data
and the data in one or more records. As is well known in the
15 art, a match can be declared when the two sets of data exceed
some preset threshold. For example, a match can be declared
where each field exceeds some preset threshold. Alternatively,
a match can be declared where certain of the fields match
identically (such as the field that contains the city data) and
20 where the other fields exceed some threshold matching value.
Thus, it will be understood that a match can be declared in many
different ways.

 Operation then proceeds to query block 40, and client 16
determines whether there are more than one match in the results.
25 If not, then operation proceeds to step 42, and the matched
address may then be used by the client 16 in a postage meter
procedure. If, on the other hand, the AMS server 12 returned
more than one potential match, then operation proceeds to step
44, and the sender selects one of the potential addresses.
30 Client 16 then prepares an address match request with the address
data from the selected address. The query is transmitted to AMS
server 12. At step 46, AMS server 12 processes the request, and
transmits all necessary information relating to the single
address to client 16, which may then use the address in a postage
35 meter procedure. Operation then terminates.

 In one embodiment, at step 46 the AMS server 12 employs an
address filter to ensure that only a single address is returned
to client 16 (i.e., in a match address single query). The filter
only allows an address that exactly matches the input address to

1 proceed to client 16. If there is no exact match, then the
filter blocks all addresses except for a default address, as
determined by server 12. When the filter analyzes a returned
5 range-based address, it initially determines whether the contents
of that result, aside from the range, match the corresponding
contents in the original input address. If so, the filter
determines whether the ranged value lies within the range in the
result address. If so, then the filter considers the address
identical and server 12 passes the address back to client 16.

10 On the other hand, if the contents of the result, aside from
the range, do not match the corresponding contents in the
original input address, then the filter only passes a default
address.

15 When the server 12 returns the results to client 16, some of
the addresses may contain ranges (e.g., 100 Main Street Suite
100-105). If that address is the one selected by the user,
client 16 then requires user to select the correct number from
the range (e.g., Suite 102). That address is then transmitted
20 back to server 12 for cleansing and validation. For this query,
client 16 utilizes at "Matching Address Single" query for
validation, and the results ensures a return of a Delivery Point
Bar Code (DPBC) value. The "Matching Address Single" query is
described in greater detail below.

25 In one embodiment, AMS server 12 returns the results of an
address validation along with a result code to indicate to client
16 the outcome of the validation process. For example, the
result code may indicate that the input address 1) is valid, 2)
is corrected, 3) was not found, 4) has multiple potential
matches, 5) includes an invalid number or street, 6) includes an
30 invalid city, 7) includes an invalid state, 8) includes an
invalid ZIP code, and the like. The result code may then be used
by client 16 accordingly.

35 In this manner, system 10 provides a server-based address
matching system that does not require each user to maintain a
database of validated addresses. As the set of validated
addresses changes, only the central database 14 at server 12
requires updating. Each individual client 16 need not update any
list in their respective memories. In this manner, system 10
ensures that addresses may be properly validated as soon as

1 database 14 is modified. There is no need to rely upon each individual user at each client 16 to update the respective machines.

5 As described above, each client 16 preferably maintains one or more companion files (e.g., data files, a database, or any other suitable storage location in a memory) to which is saved selected data for each validated address. In one embodiment, the records in the companion file are purged when the client 16 software determines that the record expiration date has expired, thereby requiring that the previously validated addresses be
10 validated again. In another embodiment, each record includes an associated expiration date, so that client 16 may determine whether the record is valid or whether it has expired, such that the address must be validated through AMS server 12.

15 In one illustrative embodiment, client 16 maintains a companion file for each address book with which client 16 interacts. Thus, client 16 maintains a companion file for its own internal address book, and plural companion files for respective external address books, as is described in more detail below. Each address book generates a unique address identity for
20 each address record. The address identity data is stored in the companion file as a data record. In one embodiment, each record in the companion file also includes a plurality of data members, including: 1) ZIP code, 2) Address Hash, 3) Address Hash Size, 4) Address Identity, 5) Expiration date, and 6) Archive Version. The ZIP code is preferably the full twelve-digit ZIP code (ZIP
25 plus add-on plus delivery point plus check digit), or the five-digit ZIP code if the AMS server 12 did not assign an add-on to the validated address.

30 The Address Hash is the hash value for the last two printed lines (all in upper case) of the address when it was validated. As is well known in the art, a hash value is a number generated from a string of text. The hash value is substantially smaller than the text itself, and is generated by a formula in such a way that it is extremely unlikely that some other text will produce
35 the same hash value. The Address Hash size is the actual size, in bytes, of the Address Hash value.

The Address Identity data member is a key that uniquely identifies the address to which the companion record corresponds

1 in an address book database, to associate the address in an address book with the companion record in the companion file for that address book. As described above, client 16 preferably maintains a companion file for each address book.

5 The Expiration date, in one embodiment, corresponds to the expiration date of the AMS database used to cleanse the address. The AMS server 12 provides this date as part of the output of each address matching transaction. The expiration date is the date at which the address validation expires for the
10 corresponding record. After that date, the address is no longer considered valid, even if the user has not altered it and the hash values match.

The Archive Version is a version number for the respective record format. If a change is made to the companion record
15 format, the software can identify "old" records and "new" records based on the Archive Version information, which is used to ease future changes to the format of companion file records. In one embodiment, the Archive Version number is used in conjunction with the Microsoft® Foundation Classes object serialization
20 feature (which is used to read and write companion files).

Referring now to FIG. 3, operation of system 10, and in particular client 16, in connection with validating an address from an address book is described in more detail. Operation
25 begins at step 60, with the user selecting a desired destination address from an address book at client 16. At query block 62, client 16 determines whether there is a corresponding record in the companion file for the selected address. In one embodiment, this is accomplished by accessing the Address Identity values in the companion file to determine whether there is an associated
30 record for the selected address. If not, operation proceeds to step 64, and the selected address must be validated through AMS server 12. System 10 then proceeds through the process shown in FIG. 2 and described above.

On the other hand, if there is an associated record in the companion file, the operation proceeds to query block 66, and
35 client 16 determines whether the record in the companion file is expired, for example, by reviewing the Expiration date data member stored in the companion file record. If the record has expired, then the record is stale and operation proceeds to step

1 64. If the record is instead extant, then operation proceeds to
query block 68, and client 16 determines whether the address has
been altered by the user. Preferably, this is accomplished by
5 comparing hash values for the selected address and the record in
the companion file. In one embodiment, the hash value is
generated from the last two lines of the address (e.g., street
and city/state/ZIP), and the hash value is compared to the
recorded hash value in the record. If the hash values match,
10 then operation proceeds to step 70, and the selected address is
still valid. If the hash values do not match, then operation
proceeds to step 64, and the address must be validated through
AMS server 12.

15 In one embodiment, each client 16 maintains an internal
address book (i.e., a data file) that contains address records
stored in a preselected format. For example, the address book
may include the following element fields for each record, in a
specific order: Name, Title, Street Address, City, State, and Zip
Code. This order is the internal canonical schema supported by
system 10.

20 System 10 also provides software resident at each client 16
that allows for the importation of address data from various
third-party address books into the address book maintained by
client 16. In one illustrative embodiment, client 16 maintains
a plurality of address book providers 15 (FIG. 5), with each
25 provider 15 being operative to interface with a corresponding
external address book application. In another embodiment, for
example, in the case of address books that do not have an
associated provider 15, the importation of addresses relies on
comma-separated value (CSV) files. As is understood by those
30 skilled in the art, many software applications can generate CSV
files that contain data in fields separated by commas.

35 Operation of the system 10 in importing CSV files is now
described in connection with FIG. 4. Operation commences at step
80, with a user at client 16 requesting to import one or more
addresses from a third-party address book. At step 82, the user
selects the CSV file(s) to import from a list of CSV files stored
in memory, or in any other suitable manner. Client 16 then
prompts the user to select the address book application used to
store the CSV file, and at step 84 the user enters such

1 information. Client 16 maintains a set of data corresponding to
field types and field sequence for each address book application.
For example, one address book application may designate five
fields for each address record in a selected order, such as name,
5 organization, street address, city and state, and ZIP code.
Another address book application may include the name and
organization in one field, and separate the city and state into
different fields. Thus, client 16 is preferably programmed with
such information for various address book applications.

10 Operation then proceeds to step 86, and client 16 receives
the CSV file(s) from the file system, and also retrieves the
appropriate format information based on the address book
application identified by the user. Client 16 then parses
through the data in the CSV file(s), reading the data for the
15 respective fields and inserting the data into a format that is
supported by client 16 and that is suitable for storage in the
native address book database of system 10. As is known in the
art, the USPS address matching service supports a particular
schema format (FIG. 7), in which the first field contains data
20 relating to Address Line 1 (e.g., street address), the second
field contains data relating to Address Line 2 (e.g., Post Office
Box number) and a firm or organization name, the third field
contains data relating to the city, the fourth field contains
data relating to the state, and the fifth field contains data
25 relating to the ZIP code.

Thus, client 16 determines, based on the address book
application used to create the address record, which portion of
the CSV data maps to the native address book database supported
by system 10. Then, this data is mapped to canonical fields as
30 all other address book databases are accessed through the
respective address book providers, as is described in more detail
below.

Operation then proceeds to query block 88, and client 16
determines whether the user wishes to validate one or more of the
35 addresses via AMS server 12. If so, then system 10 performs the
validation process as is described above in connection with FIG.
2. If not, then operation terminates.

If the user wishes to validate an address, client 16
determines whether a match has been found for each address that

1 the user wishes to validate. As described above, the validation
process may include transmitting a list of potential matches to
client 16 for display to the user, and then allowing the user to
select from that list to create a match. If a match is found,
5 the address data is added to the address book maintained by
client 16, and information relating to the matched address is
stored in the companion file, as described above.

As described in more detail below, when client 16 is
provided with a list of potential address matches, the user then
may select one of the addresses from the list. Once the user
10 selects one of the addresses, server 12 is queried again using
one or more permuters, as are described in more detail below.
Server 12 then returns a validated, cleansed address that is
stored in the appropriate address book, and the appropriate
updates are made to the corresponding companion file.

15 On the other hand, if there are no matches found for one or
more of the addresses, client 16 determines whether the user
wishes to correct the address information for the unapproved
address or addresses, by displaying a suitable graphic on the
screen and allowing the user to decide whether to correct the
20 address(es) or not. If not, then the non-approved address data
is discarded. If the user does wish to correct an address, then
client 16 receives such information from the user. In one
embodiment, client 16 displays a suitable graphic with plural
fields (windows) into which the user may enter or modify data,
25 as is shown in FIG. 12. Once the user has entered the changes,
client 16 once again attempts to validate the address via AMS
server 12.

Referring now to FIG. 5, there is shown another illustrative
embodiment of system 10. In this embodiment, system 10 maintains
30 one or more external address book application programming
interface (API) providers 15 (hereinafter "address book
providers"). Each address book provider 15 is designed to
natively support a corresponding external address book, such that
the address data at each external address book need not be stored
35 in CSV (or some other) format prior to introduction to client 16.
In one illustrative embodiment, the address book providers 15 are
COM components that are installed by client 16. For example, one
or more of the address book providers 15 are built on Extended

1 Systems' Harmony translator API that enables direct address book
database traversal. Other providers 15 may be based on Messaging
Application Programming Interface (MAPI) protocol. When each
address book provider 15 is installed, the provider registers in
5 a suitable registry, such as Windows registry, using the COM
category API.

Each address book provider 15 is designed to interface
between the client address book component 15 and the respective
external address book component 17, which allows for dynamically
10 modifying data in the corresponding address book, without the
need for making a copy of the data contained in the external
address book. Each provider 15 allows access to the database or
databases of the respective external address book, and provides
the mechanism for translating, in both directions, between the
15 external address book's database structure and the internal
canonical schema of system 10 (e.g., data or other instructions
that serve to identify the pertinent characteristics of the
external address book). This then allows for entering addresses
through system 10, and writing them to an external address book
20 17, or reading address data from one or more external address
books 17 and processing the address data at server 12 to map the
address data into a data structure that has the appropriate
format for comparison with the set of validated addresses
maintained by server 12.

25 When an address book provider 15 is loaded, it reports its
schema representation to client 16, and for each field in its
schema, the provider communicates 1) the name of the field, 2)
a canonical field name to which the field is mapped, 3) data type
(e.g., string), 4) data size, and 5) attributes of that field.
30 Thus, when address data is read from a particular address book
and such data is made available to client 16, client 16 may pass
that information on to server 12, along with schema
representation information to server 12, so that server 12 may
intelligently process the incoming address data.

35 The internal address book component 19 of client 16 provides
a canonical schema into which the addresses from the respective
external address books are formatted. The canonical schema is
the symbolic representation of all postal address fields that are
encountered in the respective external address books. These

1 fields identify the semantics of the postal fields used for a particular address book. FIG. 6 depicts the canonical field names encountered for various address books.

5 As described above, client 16 transmits an address validation request to AMS server 12, along with the address data in a format that is compatible with the internal canonical schema. However, it will be understood by those skilled in the art that a match may still be hard to obtain in the first stage, because of different formats that AMS server 12 must attempt to map to the USPS-supported format.

10 In order to increase the likelihood of obtaining one or more matches, system 10 provides a set of query permutations to configure the input address in various formats to enhance the likelihood of obtaining one or more matches. In one illustrative embodiment, system 10 utilizes three different permuting techniques to map different schema formats to the USPS-supported schema, namely a direct permuter, a single line permuter, and a truncate permuter. Thus, a structured address is processed, prior to transmission to AMS server 12, using the three permuters to increase the chance of finding a match for the address. Each permuter attempts to map the available input fields to the USPS-supported schema, but with a slightly different form. It will be understood that more or less permuters can be used.

25 The direct permuter directly maps the input data to the USPS-supported schema. FIG. 7 schematically shows a direct permutation process performed on an address record consisting of three address line fields, in which the order of the first and second fields is switched, and the third field (Address Line 3) is mapped to respective City, State, and ZIP code fields in the internal canonical schema of system 10.

30 The single line permuter is used when the street address information is not contained on a single line, for example, when the suite number is on its own line. The single line permuter appends the Address Line 2 data to Address Line 1 to create a single line for street address data. FIG. 8 schematically shows such a permutation process.

35 The truncate permuter receives the direct permuter output and analyzes the first address line to determine whether to modify the data in that line. FIG. 9 is a flow chart showing the

1 process steps of the truncate permuter. Operation begins at step
100, and the first address line from the direct permuter output
is taken. At query block 102, client 16 determines whether there
are three or fewer tokens in the address line. As used herein,
5 a "token" is defined as an element that is separated from other
elements by commas, periods, tabs, spaces, apostrophes, quotes,
colons, or semicolons.

If there are three or fewer tokens in the line, then
operation proceeds to step 104, and the truncate permuter does
not modify the address line, and operation ends. On the other
10 hand, if there are more than three tokens in the address line,
then operation instead proceeds to step 106, and client 16
compares the fourth through last tokens in the address line with
a list of common abbreviations. For example, the address line
may be "123 South Main St.". The fourth token is "St", which is
15 found in the list of common abbreviations. The list of common
abbreviations will also include other well-known abbreviations,
such as "Ave", "Blvd", "NW", "SW", and the like.

Then, at query block 108, client 16 determines whether there
is a match. If not, operation proceeds to step 110, and only the
20 first three tokens are kept, and the fourth through last tokens
are deleted from the address line. If there is a match in one
of the fourth through last tokens, then operation instead
proceeds to step 112, and all tokens after the matched token are
dropped. For example, "123 South Main St. Harbor Marina" becomes
25 "123 South Main St.". This modified address is then added to the
ordered, permuted address list for validation at AMS server 12.

As described above, each external address book has its own
unique set of fields, some of which are not mapped to the USPS-
30 supported schema. The data in those fields is preferably saved
by AMS server 12 in memory during the permutation and address
validation process. Then, when a validated address is returned
to client 16, the data is reincorporated into the final address.
For example, the external address book may have fields for Title
and Department, which are not contained in the USPS-supported
35 schema. Thus, the data in those fields is removed during the
conversion into the USPS-supported schema. Once a valid address
is returned, the data is reincorporated into the address that is
presented to the user.

1 Typically, when multiple matches are returned to client 16,
the results do not include Delivery Point Bar Code (DPBC) values.
Thus, when a user selects one of the addresses, a second query
is transmitted to AMS server 12 to retrieve all necessary
5 information concerning the selected address, including a DPBC
value. In another embodiment, AMS server 12 is programmed to
return a DPBC value for each output address transmitted to client
16. In yet another embodiment, AMS server 12 compares the input
9-digit ZIP code with the ZIP code of each output address. For
10 each output address whose ZIP code matches the input ZIP code,
the DPBC value is retrieved and transmitted for each output
address.

In one embodiment, system 10 ranks each of the potential
matches according to the following criteria: 1) when only a
15 single address is returned, no ranking is necessary; 2) all
multiple addresses are returned with a default ranking of
"possible"; 3) addresses that match the firm name or ZIP code are
ranked as "better". Ranking is preferably performed by a series
of conventional ranking agents, such as those that determine if
20 an address matches the input address Firm Name or ZIP code.

From the foregoing, it will be apparent to those skilled in
the art that the system and method of the present invention
provide for validating addresses through a central server. The
system and method also provide novel techniques for improving the
25 outcome of such address validating procedures.

While the above description contains many specific features
of the invention, these should not be construed as limitations
on the scope of the invention, but rather as exemplary
embodiments thereof. Many other variations are possible.
30 Accordingly, the scope of the invention should be determined not
by the embodiments illustrated, but by the appended claims and
their legal equivalents.

WHAT IS CLAIMED IS:

1. A system for comparing a received address with a set of validated addresses, the system comprising:

a remote device that is operative to receive address data from a source; and

an address matching server that maintains a database containing the set of validated addresses, wherein the address matching server is capable of communication with the remote device via a communication network, the address matching server being operative in response to receipt of the address data from the remote device to process the address data using at least one query permuter, compare the processed data with the set of validated addresses, and transmit one or more matches to the remote device.

2. The system of claim 1, wherein the source is a user manually entering address data into the remote device.

3. The system of claim 1, wherein the source is a database of addresses that is accessible by the remote device.

4. The system of claim 1, wherein the remote device and address matching server are capable of communication over a computer network.

5. The system of claim 4, wherein the computer network comprises the Internet.

6. The system of claim 1, wherein the server is operative to process the received address data to generate multiple data structures incorporating the address data.

7. The system of claim 6, wherein the server applies a plurality of query permuters to the address to generate the multiple data structures.

8. The system of claim 1, wherein the remote device is operative to maintain a companion file that contains information

1 relating to validated addresses, and wherein the remote device
is operative to write said information to the companion file.

5 9. The system of claim 1, wherein the remote device
comprises a computer terminal.

10 10. The system of claim 1, wherein the remote device
comprises one of a cellular telephone and wireless display
device.

11. A method for validating an address entered by a user at
a terminal, comprising:

receiving the address from a source;

15 accessing a database that contains one or more valid
addresses;

comparing the address from the user with the database of
valid addresses; and

storing information relating to the address in a companion
file if a match is found.

20 12. The method of claim 11, wherein receiving the address
comprises importing the address from a database of addresses.

25 13. The method of claim 12, wherein the address from the
database of addresses is saved as comma-separated value (CSV)
data, and further including:

determining selected characteristics of the database of
addresses; and

30 processing the CSV address data based on the characteristics
of the database of addresses.

14. The method of claim 11, further including:

receiving a second address from the source;

35 comparing selected information from the second address with
stored information in the companion file;

approving the address for use if the selected information
corresponds with the stored information in the companion file;
and

1 accessing the database of valid addresses if no match is
found.

5 15. The method of claim 14, wherein comparing the second
address with the stored addresses in the companion file comprises
determining whether a stored address in the companion file is
stale, and rejecting the stored address if it is stale.

10 16. The method of claim 11, wherein accessing the database
comprises accessing a remote database over a communication
network.

15 17. The method of claim 16, wherein the database is
maintained by a remote address matching server.

20 18. A method for matching an address with a database of
valid addresses, comprising:

receiving address data in a particular format;

manipulating the data into a predetermined format
corresponding to said particular format;

25 comparing data in the predetermined format with valid
addresses in the database; and

presenting the results if one or more matches are found.

30 19. The method of claim 18, wherein comparing data in the
predetermined format with valid addresses in the database
comprises accessing a remote database of addresses over a
communication network.

35 20. The method of claim 19 wherein the database is
maintained by a remote address matching server.

21. The method of claim 18, wherein manipulating comprises
applying a plurality of query permuters to the address data to
convert the data into respective formats.

22. The method of claim 21, wherein applying a plurality of
query permuters comprises applying at least one of a direct
permuter and a single line permuter to the address data.

1 23. The method of claim 22, wherein applying further
comprises applying a truncate permuter to the output structure
of the direct permuter.

5 24. A method for importing one or more addresses from a
database of addresses, where the database of addresses stores
address data in a selected format, the method comprising:

storing the one or more addresses at the database of
addresses in the selected format;

10 receiving the address data along with identification data to
identify at least a characteristic of the database of addresses;

processing the identification data; and

15 processing the address data in a particular manner based on
the identification data corresponding to the database of
addresses.

25 25. The method of claim 24, wherein storing the one or more
addresses in a particular format comprises storing the one or
more addresses in a comma-separated value (CSV) format.

20 26. The method of claim 24, wherein receiving the address
data along with identification data comprises receiving the
address and identification data from an external database of
addresses.

25 27. The method of claim 24, wherein receiving the
identification data comprises receiving identification
information input by a user.

30 28. A system for comparing a received address with a set of
validated addresses, the system comprising:

35 a remote device that maintains an internal address book in
a particular data format, the remote device including at least
one address book provider that is operative to interact with an
external address book, the provider being operative to access
data in the external address book and to provide data relating
to translation between a database structure of the external
address book and a second format; and

1 an address matching server that maintains a database
containing the set of validated addresses, wherein the address
matching server is capable of communication with the remote
device via a communication network, the address matching server
5 being operative in response to receipt of the address data and
translation data from the remote device to process the address
data and transmit one or more matches to the remote device.

10 29. The system of claim 28, wherein the remote device
includes at least two address book providers, wherein the address
book providers are compatible with respective external address
books.

15 30. The system of claim 28, wherein the address book
provider is operative to provide schema representation
information to the server.

20 31. The system of claim 30, wherein the address book
provider is operative to provide information for plural fields
in the schema representation.

25 32. The system of claim 31, wherein the address book
provider provides, for each field in the schema, one or more of
the name of the field, a canonical field name to which the field
is mapped, data type, data size, and attributes of that field.

30 33. A method of comparing a received address with a set of
validated addresses, the method comprising:

identifying an address in an external address book;

35 accessing corresponding address data in the external address
book with an address book provider that is operative to interface
with the external address book;

checking the address data against a local companion file to
determine whether the address is valid; and

validating the address at an address matching server that
maintains a database of valid addresses if the result of the
check with the local companion file does not validate the
address.

1 34. The method of claim 33, wherein validating the address
at the address matching server comprises providing the address
data and information relating to the external address book to the
server, and wherein the server is operative to process the
5 address data in a particular manner based on the contents of said
information.

10 35. The method of claim 33, wherein checking the address
data against a local companion file comprises determining whether
a record in the companion file is extant.

15 36. The method of claim 33, wherein checking the address
data against a local companion file comprises comparing the
address data with a hash value stored in the companion file.

20 37. The method of claim 33, wherein validating comprises
validating the address at a remote address matching server.

25 38. A method of comparing a received address with a set of
validated addresses, the method comprising:
identifying an address in an external address book;
accessing corresponding address data in the external address
book with an address book provider; and
validating the address at a remote address matching server
that maintains a database of valid addresses.

30 39. The method of claim 38, wherein validating the address
at the remote address matching server comprises providing the
address data and information relating to the external address
book to the server, and wherein the server is operative to
process the address data in a particular manner based on the
contents of said information.

35 40. The method of claim 39, wherein the address matching
server utilizes one or more query permuters to process the
address data.

1 41. The method of claim 40, wherein applying a plurality of query permuters comprises applying at least one of a direct permuter and a single line permuter to the address data.

5 42. The method of claim 40, wherein the address matching server utilizes a plurality of query permuters to process the address data.

10 43. The method of claim 42, wherein applying a plurality of query permuters comprises applying at least one of a direct permuter and a single line permuter to the address data.

15 44. The method of claim 43, wherein applying further comprises applying a truncate permuter to the output of the direct permuter.

45. A method of comparing a received address with a set of validated addresses, the method comprising:

identifying an address in an external address book;

20 accessing corresponding address data in the external address book with an address book provider; and

validating the address at a server that maintains a database of valid addresses, wherein validating comprises using one or more query permuters to process the address data.

25 46. The method of claim 45, wherein validating comprising utilizing a plurality of query permuters.

30 47. The method of claim 46, wherein applying a plurality of query permuters comprises applying at least one of a direct permuter and a single line permuter to the address data.

35 48. The method of claim 45, wherein validating the address comprises validating the address at a remote address matching server.

FIG. 1

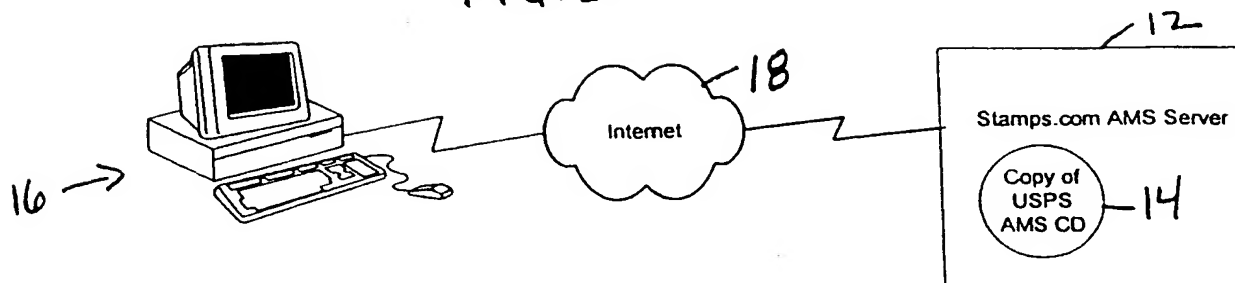


FIG. 7



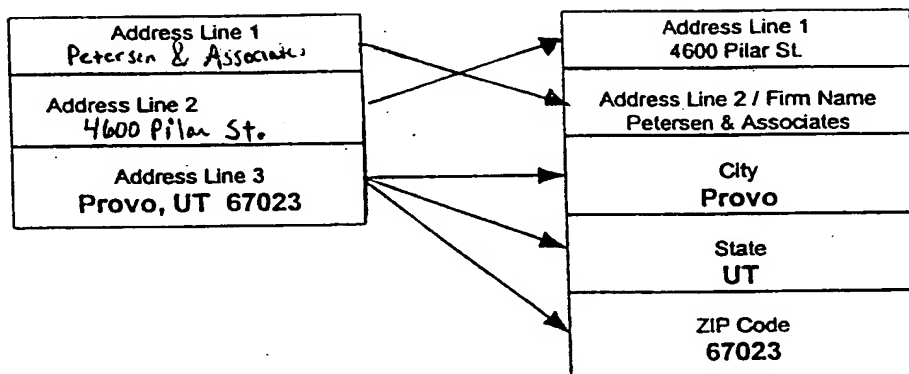


FIG. 8

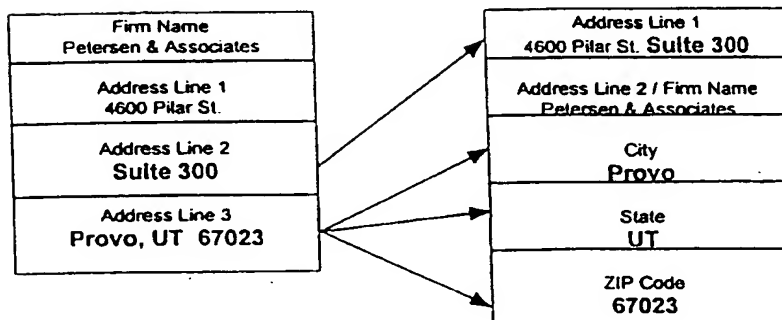

2/9

FIG. 2

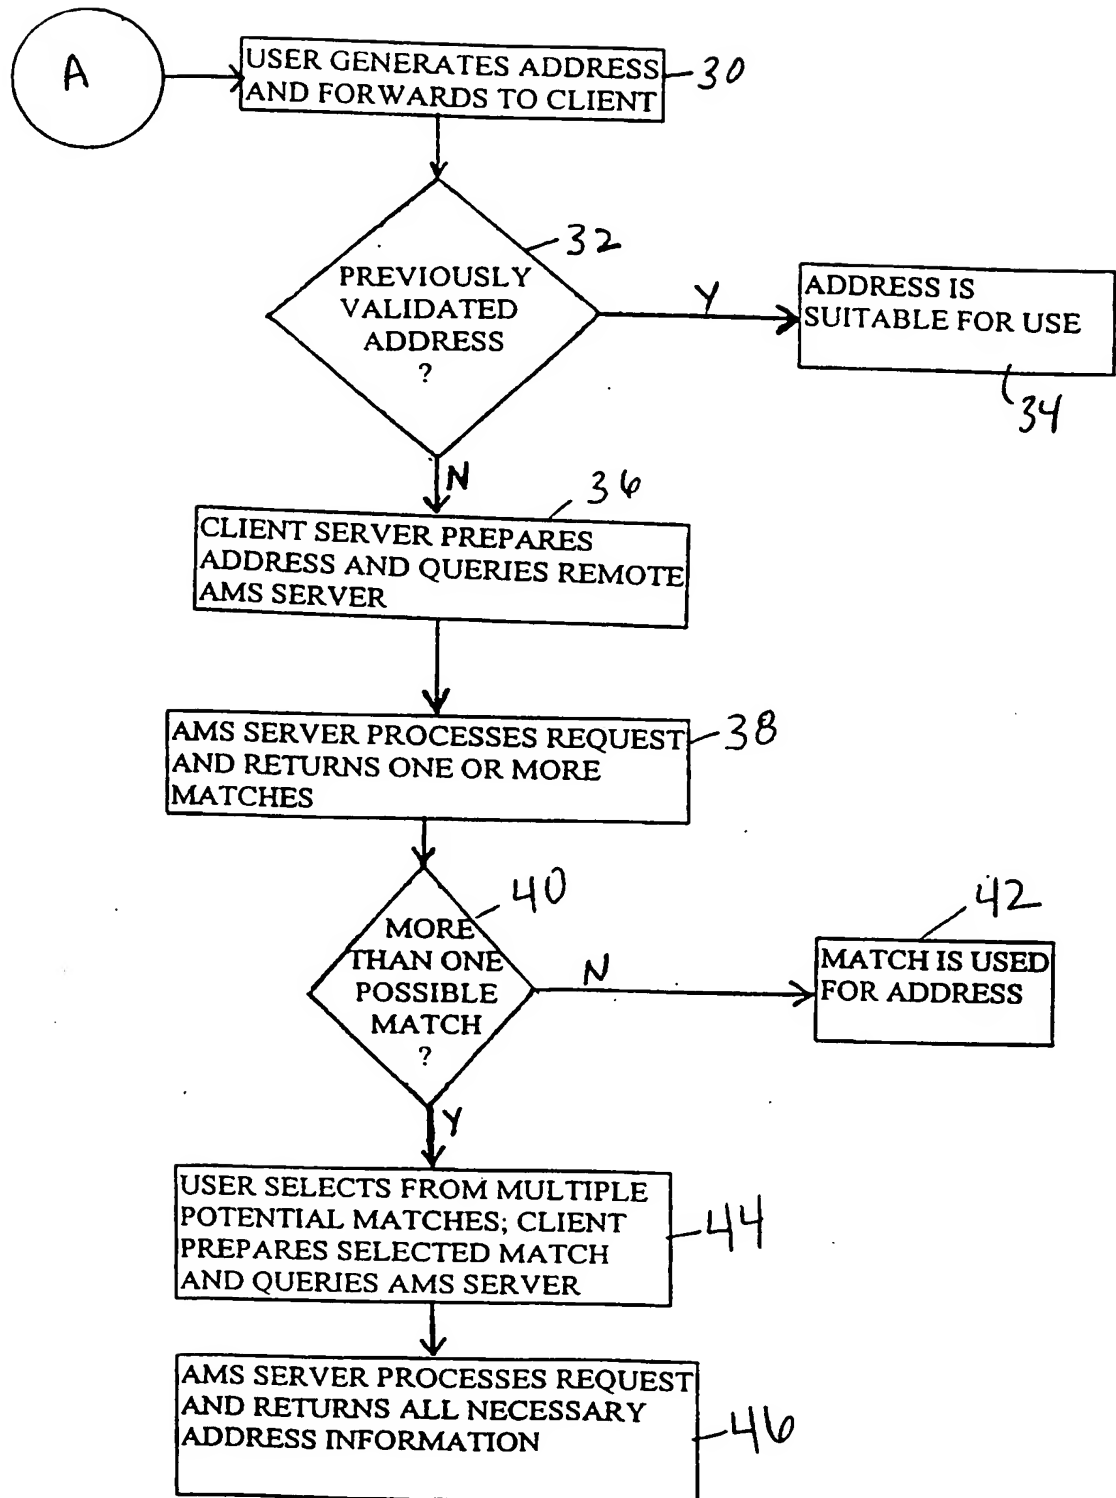

3/9

FIG. 3

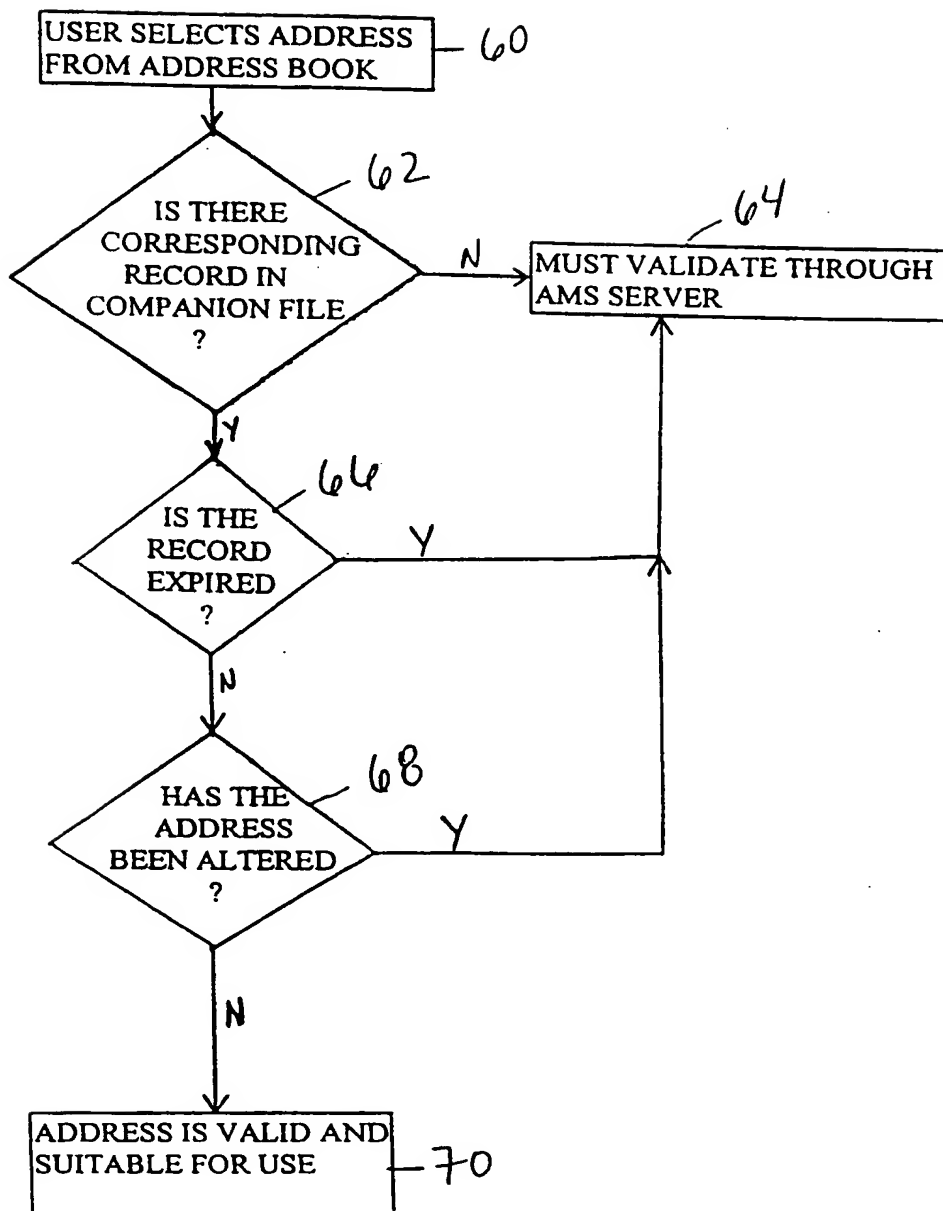
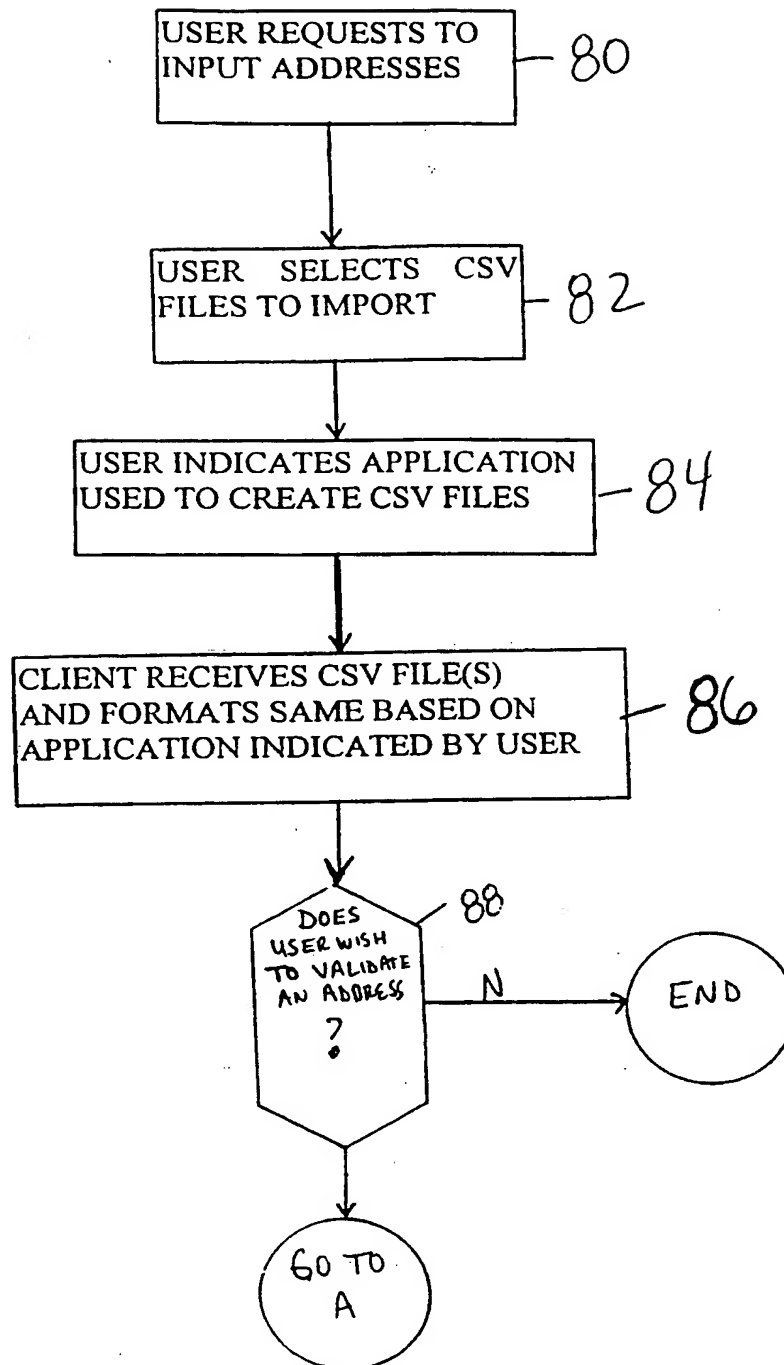


FIG. 4



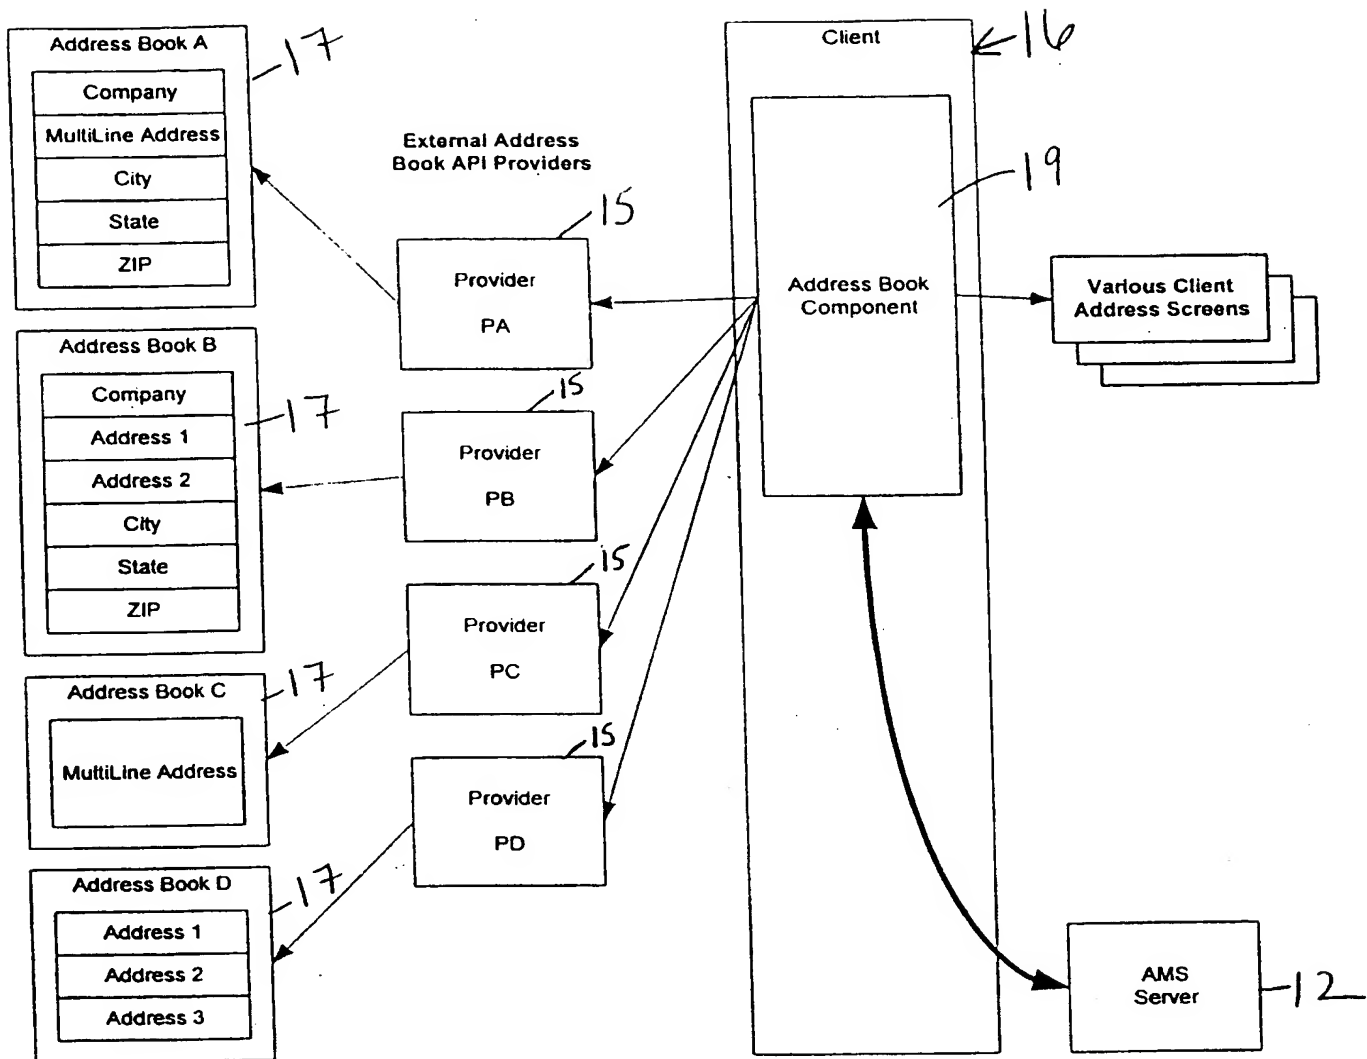



FIG. 5

Canonical Field Name	Notes
None	
DisplayName	
FullName	Mutually exclusive with [NamePrefix, NameSuffix].
NamePrefix	Mr., Ms., etc.
FirstName	
MiddleName	
LastName	
NameSuffix	Jr., M.D., etc.
Title	Corresponds to USPS Pub 28's "FUNCTIONAL TITLE".
Department	
Company	
MultiLineAddress	Mutually exclusive with [Address1-3, Unit].
Address1	
Address2	
Address3	
UnitName	Apt, Suite, etc. Cannot exist if Unit doesn't exist.
Unit	Can exist only when Address1 is present but no Address2 or Address3.
City	
State	
Zip	5-digit or 9-digit ZIP code if there is no ZipAddOn field.
ZipAddon	4-digit extension to the 5-digit ZIP code.
Country	
DPB	Delivery Point Barcode. Must be a 2 or 3 digit number.
CheckDigit	Must be a 1 digit number.
Mailstop	A USPS code.
Route	A USPS code.
Cargo	Non-user-visible BLOB that Stamps.com can "own".

FIG. 6

7/9

FIG. 9

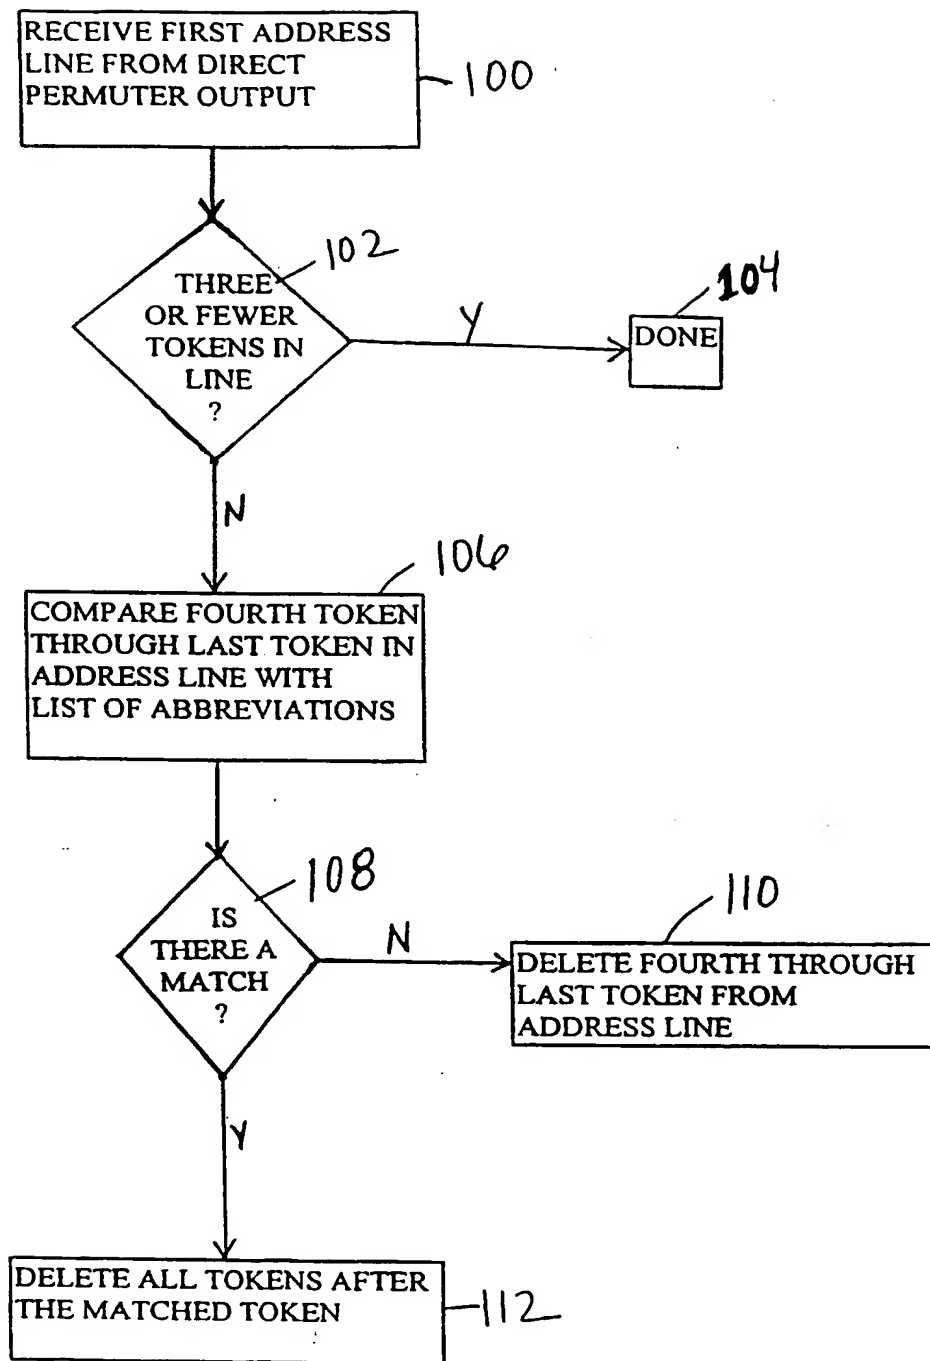

8/9

FIG. 10

Print Postage

FROM ADDRESS
 CHELSEA PETERSEN
 3420 OCEAN PARK BLVD STE 1040
 SANTA MONICA, CA 90405

TO ADDRESS
 MR. JOHN QUINN MILLER, JR.
 11000 WILSHIRE BLVD.
 LOS ANGELES, CA 90025

☐ Do not print the return address

Postage Information

Format: Letter

Print On: Envelope #10 (4 1/8 x 9 1/2 in)

Weight: 0.1 lb

Mail Class:

- ☒ First-Class Mail \$0.33
- ☐ Priority Mail \$3.20
- ☐ Express Mail \$11.75

Printable Postage: \$5.07

Buttons: Print Stamp, Print Postage, Options, Help

← 21

FIG. 11

Choose an Address

The address you provided in our previous correspondence is a number of mail special addresses, some of which may be (or may be) used. Please choose a mail special address from the list provided below. (To change your default address, click on the address.)

THANKS	Company	Address	City
Possible		11000 WILSHIRE BLVD	LOS ANG
Possible	PASSPORT OFFICE	11000 WILSHIRE BLVD	LOS ANG
Possible		11000 WILSHIRE BLVD STE 1700	LOS ANG
Possible		11000 WILSHIRE BLVD FL 6TH	LOS ANG
Possible		11000 WILSHIRE BLVD STE 1119	LOS ANG
Possible		11000 WILSHIRE BLVD STE (5200-5201)	LOS ANG
Possible		11000 WILSHIRE BLVD STE (5202-5203)	LOS ANG
Possible		11000 WILSHIRE BLVD STE (5204-5210)	LOS ANG
Possible		11000 WILSHIRE BLVD STE 5227	LOS ANG
Possible		11000 WILSHIRE BLVD STE 7218	LOS ANG
Possible		11000 WILSHIRE BLVD STE 1000	LOS ANG
Possible		11000 WILSHIRE BLVD STE 5210	LOS ANG
Possible		11000 WILSHIRE BLVD STE 5201A	LOS ANG
Possible		11000 WILSHIRE BLVD STE (8104-8200)	LOS ANG
Possible		11000 WILSHIRE BLVD STE 10THFL	LOS ANG

Buttons: OK, Cancel, Help

FIG. 12

Contact Information [X]

Add the information for the contact below. Also, if you know the address, you can click on the address icon to the address and the USES Address Matching System to find the address.

Name: Mr. ☒ Amos T Lewis

Title: DIRECTOR OF MARKETING

Department:

Company: ATLAS CORP.

Address: 14200 REGENTS WAY

City: ALAMEDA

State: CA ☒ ZIP Code: 90456-1212

[OK] [Cancel] [Add] [Edit]

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/41322

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G07B17/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G07B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 663 652 A (PITNEY BOWES) 19 July 1995 (1995-07-19)	1-4, 6-9, 11, 12, 14-24, 26-31, 33-48
Y	claim 1; figures 1, 2	5, 10, 13, 25
Y	EP 0 944 027 A (FRANCOTYP POSTALIA AG) 22 September 1999 (1999-09-22) claim 1; figure 1	5
Y	US 5 966 714 A (TSO MICHAEL MAN-HAK ET AL) 12 October 1999 (1999-10-12) claim 1; figure 1A	10

-/--



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

21 February 2001

Date of mailing of the international search report

28/02/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Kirsten, K

INTERNATIONAL SEARCH REPORT

In. tional Application No

PCT/US 00/41322

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 754 306 A (LYNCH-FRESHNER LAWRENCE A ET AL) 19 May 1998 (1998-05-19) column 17, line 27 - line 33; claim 1; figure 3 ---	13,25
A	WO 98 57302 A (RAHRIG JOHN G ;RILEY DAVID W (US); GRAVELL LINDA V (US); PINTSOV L) 17 December 1998 (1998-12-17) claim 1; figure 5 ---	1-48
A	WO 99 48054 A (SCHWARTZ ROBERT G ;BROOKNER GEORGE (US); ASCOM HASLER MAILING SYS) 23 September 1999 (1999-09-23) claim 1; figure 1A ---	1-48
A	EP 0 854 448 A (PITNEY BOWES) 22 July 1998 (1998-07-22) claim 1; figure 5A -----	1-48

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/41322

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0663652 A	19-07-1995	US 5454038 A	26-09-1995
		CA 2137403 A	07-06-1995
		EP 0829824 A	18-03-1998
		US 5682429 A	28-10-1997
		US 5781634 A	14-07-1998
		US 5953427 A	14-09-1999
EP 0944027 A	22-09-1999	DE 19812903 A	23-09-1999
US 5966714 A	12-10-1999	US 5706509 A	06-01-1998
		AU 2219397 A	19-11-1997
		WO 9741520 A	06-11-1997
US 5754306 A	19-05-1998	US 6147773 A	14-11-2000
WO 9857302 A	17-12-1998	AU 7961998 A	30-12-1998
		AU 7963898 A	30-12-1998
		AU 8255898 A	30-12-1998
		AU 8256698 A	30-12-1998
		AU 8567098 A	30-12-1998
		AU 8567298 A	30-12-1998
		BR 9805995 A	31-08-1999
		BR 9806225 A	21-03-2000
		CN 1234890 T	10-11-1999
		CN 1234891 T	10-11-1999
		EP 0925558 A	30-06-1999
		EP 0931299 A	28-07-1999
		EP 0925663 A	30-06-1999
		EP 0920679 A	09-06-1999
		EP 0966728 A	29-12-1999
		EP 0960394 A	01-12-1999
		WO 9857303 A	17-12-1998
		WO 9857460 A	17-12-1998
		WO 9857304 A	17-12-1998
		WO 9857305 A	17-12-1998
		WO 9857306 A	17-12-1998
WO 9948054 A	23-09-1999	EP 1062638 A	27-12-2000
EP 0854448 A	22-07-1998	US 5873073 A	16-02-1999
		CA 2225693 A	24-06-1998